


METZNER CT 4100 / 4200

PRECISION MACHINES FOR UNSLOTTED CORRUGATED PIPES



Technical Data	CT 4100	CT 4200
Corrugated tube outer diameter min. ¹⁾	4,5 mm 0,18"	4,5 mm 0,18"
Corrugated tube outer diameter max. ¹⁾	39 mm 1,54"	39 mm 1,54"
Feed rate max. ²⁾	90 m/min 295 ft/min	90 m/min 295 ft/min
Electrical connection	230 V, 50/60 Hz, 1,2 A	230 V, 50/60 Hz, 1,2 A
Drive	electric	electric
Compressed air	6 bar	6 bar
Dimensions (LxWxH)	597 x 807 x 595 mm 23,5 x 31,8 x 23,5"	597 x 807 x 595 mm 23,5 x 31,8 x 23,5"
Weight	95 kg 209,4 lbs	100 kg 209,4 lbs
Equipment		
Cutting system	Tube cut	Tube cut
Slitting module	-	✓
Feed system	Belt feed	Belt feed
Interfaces for printing	optional	optional
Interfaces for peripheral devices	✓	✓
Interfaces for IT network	optional	optional

¹⁾ material-dependent | ²⁾ infinitely adjustable

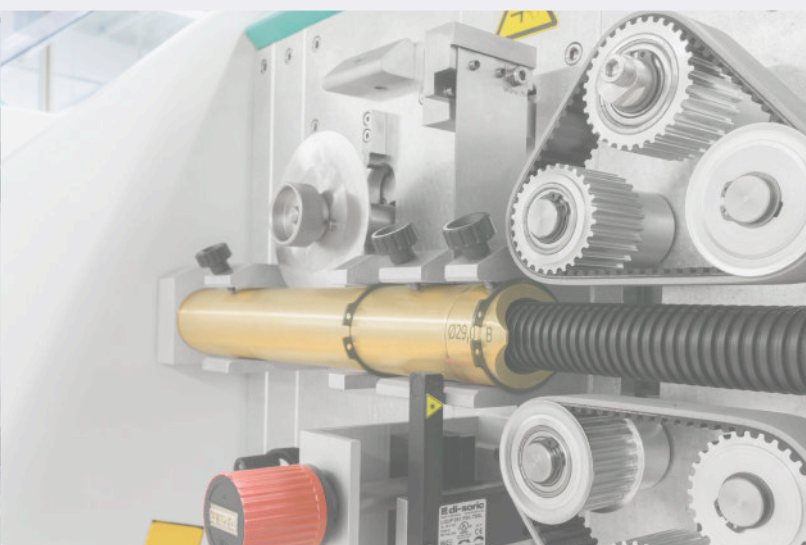

FEATURES

- Optimum adaptation to material requirements through material-specific feed systems
- Very short set-up times
- Fully integrated longitudinal slitting unit (CT 4200) for automatic longitudinal slitting of unslit corrugated tubes
- Height-adjustable slitting blade enables cuts for any diameter