


METZNER SM 4000

TWIST-PROOF CUTTING TECHNOLOGY FOR SLOTTED CORRUGATED PIPES



| | |
|---|------------------------|
| Technical Data | SM 4000 |
| Corrugated tube outer diameter min. ¹⁾ | 4,5 mm 0,18" |
| Corrugated tube inner diameter max. ¹⁾ | 40 mm 1,57" |
| Feeding speed max. ²⁾ | 160 m/min 525 ft/min |
| Electrical connection | 230 V, 50/60 Hz, 1,5 A |
| Druckluft | 6 bar |
| Drive | electro-pneumatic |
| Dimensions max. (LxWxH) | 1215 x 1020 x 1435 mm |
| Weight | 200 kg |
| Equipment | |
| Cutting system | Gear laser |
| Feeding system | Gear wheel |
| Interfaces for printing | optional |
| Interfaces for peripherals | ✓ |
| Interfaces for IT network | optional |

¹⁾ depending on material | ²⁾ infinitely adjustable

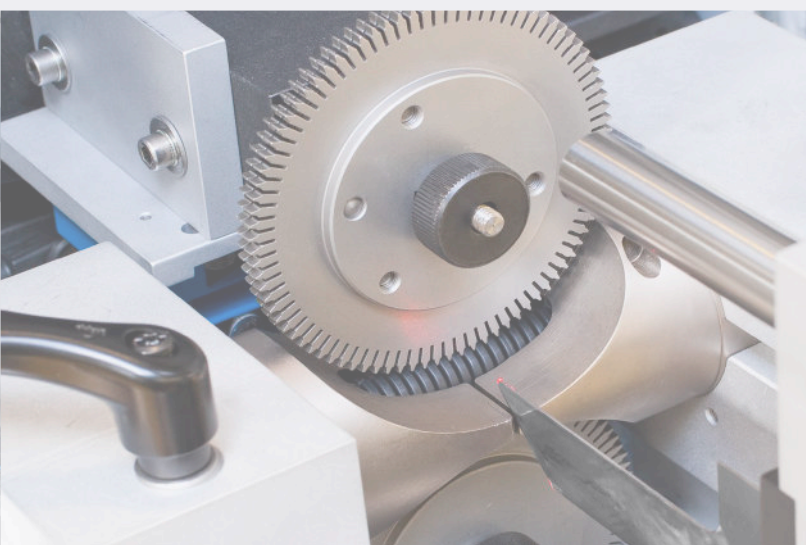

FEATURES

- For corrugated tubes from 4.5 mm to 40 mm diameter
- Patented Metzner „gearwheel laser system“ guarantees a form-fit and torsion-proof feed
- Laser sensor monitors the position of the gear wheels
- With gear wheel feed as standard